



# NEROLAC


## SURAKSHA

Acrylic Exterior Emulsion

### PRODUCT DESCRIPTION

KNP Nerolac Suraksha Acrylic Exterior Emulsion is an economical, water thinnable coating, specially designed for application on exterior walls in dry or moderately humid climatic conditions. It is an ideal choice for consumers wishing to upgrade from cement paint, since it is much superior to normal cement paint in terms of durability, finish and resistance to algae, resistance to yellowing.

### PERFORMANCE FEATURES & BENEFITS

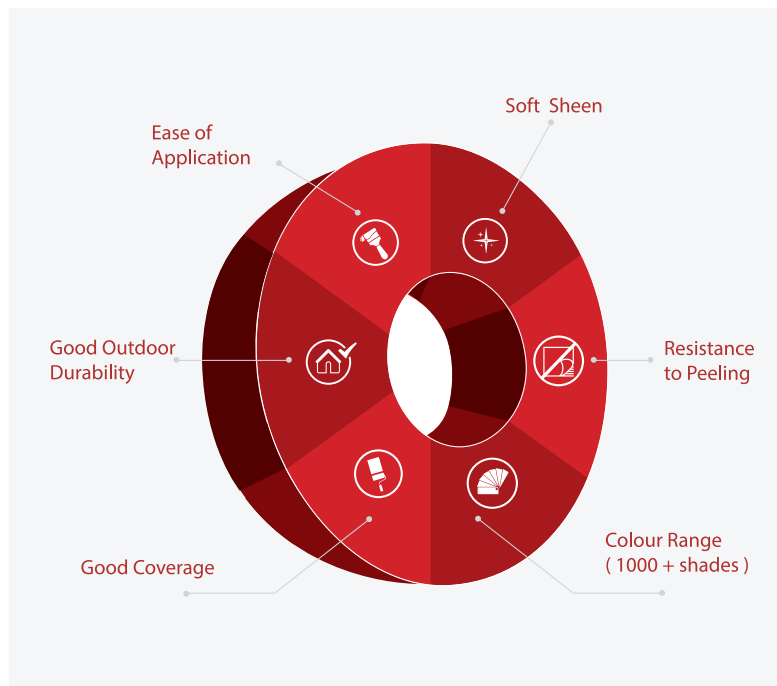

### RECOMMENDED USAGE

Nerolac Suraksha Acrylic Exterior Emulsion is specially designed for application on exterior walls of houses and architectural buildings in dry or moderately humid climatic conditions.

### RECOMMENDED SYSTEM FOR APPLICATION

1 Primer (1 Coat) Dry for 4-6 hrs

2 Finish Nerolac Suraksha Acrylic Exterior Emulsion (2-3 coats)  
Dry minimum 4-6 hrs in between coats

### SURFACE PREPARATION

- 1 The surface to be painted must be free from all dust, grease, traces of paint flakes, algae and fungus.
- 2 The surface previously coated with paint must be cleaned thoroughly with a stiff wire brush to remove dust, dirt, chalking or loose flakes.
- 3 Wash thoroughly with water and allow to dry to ensure proper adhesion of the new paint system.
- 4 In case of fungus affected area, apply a liberal coat of Nerolac Fungicidal Solution. Allow it to react for minimum 6-8 hours.
- 5 For parapet tops and other horizontal surfaces, application of 3 coats is recommended.
- 6 All structural cracks must be opened in V shape filled with cement and sand mixture and leakage should be stopped before actual painting.
- 7 Freshly plastered surfaces must be allowed to cure completely for minimum 12 weeks.

# Primer - Nerolac Exterior Primer or self priming of Nerolac Suraksha Acrylic Exterior Emulsion (100% thinning).  
For highly absorbent surfaces like Mangalorean roof tiles, apply a coat of Nerolac Air Drying Clear Sealer.

## TECHNICAL DATA



Actual Covering capacity may vary depending upon the method of application & condition of application, surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity & shade.

## PRECAUTIONS



1. Refer MSDS of Nerolac Suraksha Acrylic Exterior Emulsion for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition & fire.
3. Keep away from children.
4. In case of eye/skin contact, wash with plenty of water.
5. Inhalation/Injection is dangerous. In either case, move to fresh air & consult medical practitioners.
6. Do not apply when ambient temperature might drop to level below 10°C within 4 hours of application.
7. New plaster should be allowed to cure minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Do not use universal stainers. Stir paint well before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles/ glasses & face mask.

## POST APPLICATION INSTRUCTIONS

For the best performance of the paint, ensure proper washing and cleaning of all algae and fungal growth at regular intervals of six months.

### SAFETY FEATURES

Non-Flammable

### PACK SIZES

1 ltr, 4 ltrs, 10 ltrs & 20 ltrs.

### SHADE RANGE

As per Color Scapes Fandek and shade card.

### NO. OF SHADES POSSIBLE

More than 1000