

NEROLAC WALL PUTTY

PRODUCT DESCRIPTION

Nerolac Wall Putty is specially made by using an ideal combination of White Pigments, Extenders, Acrylic Emulsion Medium and Additives.

PERFORMANCE FEATURES & BENEFITS

- Ease of application.
- Dries quickly.
- Very good filling and cutting properties.

RECOMMENDED USAGE

For filling of dents and imperfections and levelling on primed wall, wooden and metallic surfaces prior to application of subsequent Coats. It is used for Interior application only.

SURFACE PREPARATION


Ensure the surface is clean, dry and free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down using emery paper 180 and thereafter wipe Off. Treat fungus affected area using Nerolac Fungicidal Solution. Allow to react for 6-8 hrs. Apply a coat of suitable Primer* followed by Nerolac Wall Putty to level the dents and make the surface uniform. Apply again a coat of suitable Primer* followed by sanding with emery paper 320, before applying subsequent top coats.

RECOMMENDED SYSTEM FOR APPLICATION

For NEW Masonry Surfaces



Sand the surface with Emery paper and wipe clean before application of subsequent coats.
 • Nerolac Cement Primer (Water Thinnable/Solvent Thinnable) or Goody universal Primer (Solvent Thinnable) or Goody Water Thinnable Cement primer.
 * Minimum 8 Hrs for Solvent Thinnable Primer & Minimum 4 - 6 Hrs for Water Thinnable Primer. Please look for the individual finishing system given in respective Product Data Sheet.

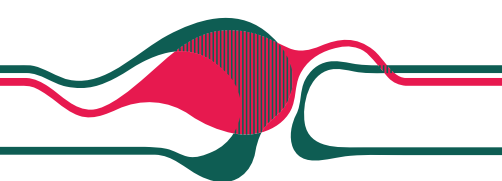



KNP NEROLAC

HEALTHY HOME PAINTS FROM JAPAN

BIRGUNJ METROPOLITAN, WARD NO. 21, PARWANIPUR, PARSA, NEPAL-44301 | CONTACT NO.:- 9801164444

TECHNICAL DATA

Drying Time Surface Dry : @270 ± 20C& RH 60 ± 5%	Surface Dry : 30 Minutes.
Gloss Levels / Sheen Levels	Overcoatability: 6 — 8 hrs.
Thinning	Matt.
Flash Point	Maximum 5% with Water.
	N. A.

*Actual coverage may vary depending on method & condition Of application. Surface roughness.

PRECAUTIONS

- 01) Refer MSDS for "Nerolac Wall Putty" for safety measures & precautions.
- 02) Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
- 03) Keep away from children.
- 04) In case of eye / skin contact, wash with plenty of water.
- 05) Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner. 06) Do not apply when ambient temperature might drop to a level below 10°C within 4 hrs of application.
- 07) New plaster should be allowed to cure for minimum 12 weeks.
- 08) Do not thin.
- 09) Stir well paint before application.
- 10) Apply by using putty knife.
- 11) The container must be tightly closed when not in use. Stir well before use.
- 12) Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

Apply finishing coat within 7 — 8 days Of primer application.

SAFETY FEATURES

Non-Flammable.

PACK SIZES

1 kg, 5 kgs, 10 kgs & 20 kgs.

SHADE RANGE

White.